


MALE ADAPTORS

O-Ring seal short & long adaptors available in 15-50mm (1/2" - 2"). Manufactured from High Quality Glass Fibre Reinforced Nylon for a weather, termite, fungi & bacteria resistance.

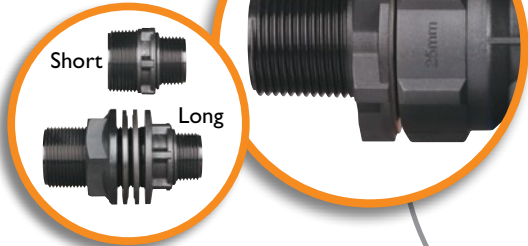

Short
Long

COMPACT!

Ideal for confined spaces the Hansen Fast~Flo valve is well suited to trough/tank environments that demand a compact sized valve.



Small Bowls

Compact Troughs

Header Tanks


Feeders

MAXIMUM WORKING PRESSURE
12 Bar (174 psi) @ 20°C

EZI BEND LEVEL ADJUSTMENT
Hansen Fast~Flo Valves feature a patented Hansen Ezi Bend brass arm making level adjustment a breeze




Top Entry Installations

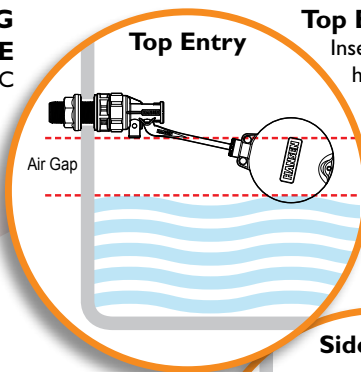

Air Gap

Insert the Long Tail Adaptor through the inlet hole in the trough wall, place Poly Washer on Long Tail Adaptor; thread on Adaptor Nut then tighten firmly. Do not over tighten. Screw the Fast~Flo Float on to the Brass Arm, do not bend Brass Arm

Side Entry Installations

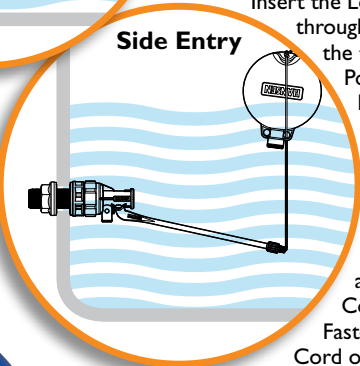

Side Entry

Insert the Long Tail Adaptor through the inlet hole in the trough wall, place Poly Washer on Long Tail Adaptor, thread on Adaptor Nut then tighten firmly. Do not over tighten. Screw the Cord Nut* onto the Fast~Flo Brass arm. Thread the Cord* through the Fast~Flo Float. Tie the Cord off to achieve the correct water level.

*Cord and Nuts only supplied with long arm version.

SUITED TO TOP OR SIDE ENTRY

REVERSIBLE SEAL

Reversible seal effectively doubles the valves life.



STRONG LONG LIFE SEAL
Versatile, Tough, Double Sided Urethane Seal.

FLOW RATE
29 PSI, 34L/PM



HOSE BARB OUTLET

Acts as a diffuser for quiet operation and controlling the outlets flow in confined spaces

ANTI-SYPHON HOLES

When the valve body outlet is submerged in water or has an extension outlet tube attached, the Anti-Syphon Holes have been designed to be knocked out to prevent the valve from back flowing as long as the Anti-Syphon Holes are above water level.

MATERIALS APPROVED FOR DRINKING WATER

All plastic parts used in the manufacturing of Fast~Flo valves have been approved for use with potable water.



HAND TESTED
All Hansen Fast~Flo Valves are rigorously hand tested.

Store Packaging



Long Arm Valve

Short Arm Valve

HANSEN

Fast~Flo Valves

NOTE: High pressure and or flow can cause water turbulence when used in top entry installations. To minimise use a short piece of pipe to act as a diffuser. To prevent back flow when using a diffuser punch out the Anti-Syphon Holes.

A Reliable, Compact Trough/Tank Valve

www.hansenproducts.com