


MALE ADAPTORS

O-Ring seal short and long adaptors available in 15-50mm (1/2" - 2"). Manufactured from High Quality Glass Fibre Reinforced Nylon for a weather, termite, fungi & bacteria resistance.

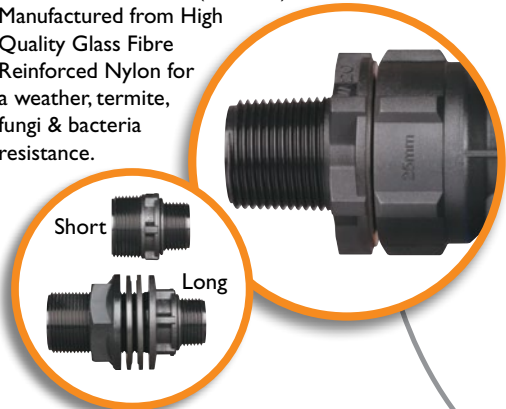


ULTRA COMPACT!

Ideal for very confined spaces the Hansen Mini Fast~Flo valve is well suited to trough/tank environments that demand a compact sized valve.



Top Entry Installations

Insert the Long Tail Adaptor through the inlet hole in the trough wall, place Poly Washer on Long Tail Adaptor, thread on Adaptor Nut then tighten firmly. Do not over tighten. Screw the Mini Fast~Flo Float onto the Arm and adjust float level as desired.

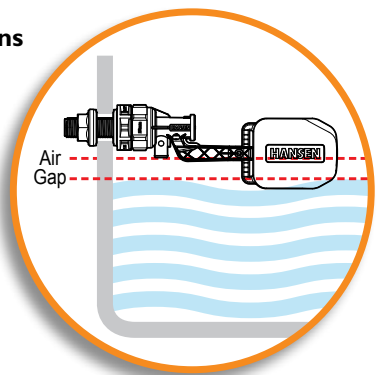

REVERSIBLE SEAL

Reversible seal effectively doubles the valves life.



STRONG LONG LIFE SEAL

Versatile, Tough, Double Sided Urethane Seal.



Store Packaging

ANTI-SYPHON HOLES

When the valve body outlet is submerged in water or has an extension outlet tube attached, the Anti-Syphon Holes have been designed to be knocked out to prevent the valve from back flowing as long as the Anti-Syphon Holes are above water level.



FLOW RATE
29 PSI, 9L/PM



HANSEN EZI CLAMP ARM LEVEL ADJUSTMENT

Hansen Mini Fast~Flo Valves feature a Hansen Ezi Clamp arm allowing the 70mm float to be moved up or down making level adjustment a breeze



HAND TESTED
All Hansen Mini Fast~Flo Valves are rigorously hand tested.

HOSE BARB OUTLET

Acts as a diffuser for quiet operation and controlling the outlets flow in confined spaces



MATERIALS APPROVED FOR DRINKING WATER

All plastic parts used in the manufacturing of Mini Fast~Flo valves have been approved for use with potable water.

MAXIMUM WORKING PRESSURE
12 Bar (174 psi) @ 20°C

NOTE: High pressure and or flow can cause water turbulence when used in top entry installations. To minimise use a short piece of pipe to act as a diffuser. To prevent back flow when using a diffuser punch out the Anti-Syphon Holes.

HANSEN™

mini Fast~Flo Valves

A Reliable, Ultra Compact Trough/Tank Valve

www.hansenproducts.com